


INSTALL STAINLESS STEEL ZIP TIES BETWEEN EVERY BLOCK. ZIP TIES SHALL ENCOMPASS 3 CORDS OF GEOGRID ON EACH SIDE OF THE SEAM.

12" MINIMUM UNDERLAYMENT: EVENLY SPACED UNDER SEAM

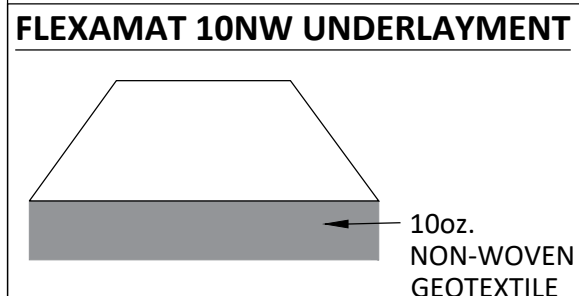

FLEXAMAT 10NW - ACCESS ROAD ARMORING

SUBGRADE THICKNESS OF CRUSHED STONE		
SITE SOIL TYPE	LIGHT LOAD VEHICLES: CARS/PICKUP TRUCKS	HEAVY LOAD VEHICLES: LARGE TRUCKS, RV'S, DELIVERY VEHICLES
GRAVEL AND SAND, COURSE WELL DRAINED SOILS	BASE: 3.5-7.5" OF CRUSHED STONE	BASE: 7.5" OF CRUSHED STONE
SILTY SOILS, FINE GRAIN SOILS, POOR DRAINAGE	BASE: 7.5" OF CRUSHED STONE	BASE: 9.5" OF CRUSHED STONE
CLAY SOILS FINE TO VERY FINE	BASE: 6-9.5" OF CRUSHED STONE	BASE: 10" OF CRUSHED STONE

*ROLLS AVAILABLE IN MULTIPLE WIDTHS: 4', 5.5', 8', 10', 12', AND 16'.

MOTZ ENTERPRISES, INC.

Flexamat
(513)772-6689
Info@Flexamat.com
Flexamat.com

