


PIPE OUTER DIAMETER **FLEXAMAT** LEADING AND ENDING EDGES OF CHANNEL TO BE TRENCHED 4 ROWS OF **BLOCKS. BACKFILL WITH COHESIVE SOIL**

CHANNEL ARMORING

PROFILE VIEW

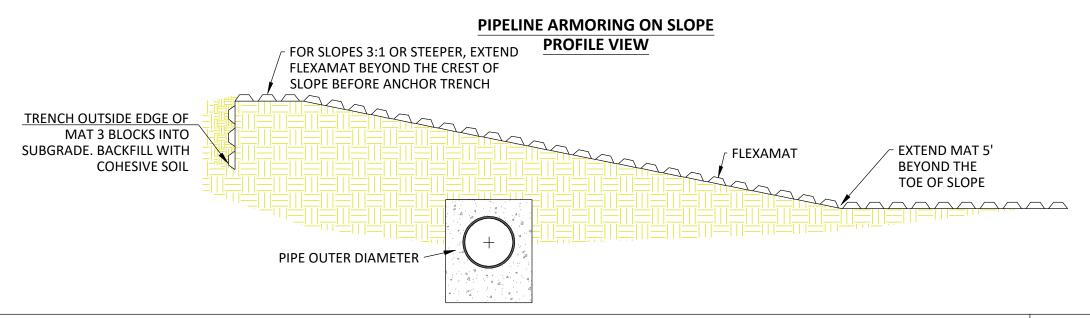

FLEXAMAT - PIPELINE ARMORING

CONSTRUCTION NOTES:

- 1. BEDDING SURFACE SHALL BE BROUGHT TO GRADE PER PLAN/PROFILE DRAWINGS, AND ALL SUBGRADE SURFACES PREPARED ENTERPRISES, INC. FOR PLACEMENT OF MATS SHALL BE SMOOTH AND FREE OF ALL ROCKS, STICKS, ROOTS, OTHER PROTRUSIONS, OR DEBRIS OF ANY KIND.
- FLEXAMAT ROLLS CAN BE MANUFACTURED UP TO 16' WIDE AND 100' LONG. IT IS RECOMMENDED TO USE THE LARGEST MATS POSSIBLE TO REDUCE OVERLAP AND ABUTMENT SEAMS.
- CONSULT THE MANUFACTURER FOR A LAYOUT OF THE PIPELINE ARMORING

MOTZ

Flexamat

(513)772-6689 Info@Flexamat.com Flexamat.com

