




ABUTMENT METHOD FOR SEAMS PERPENDICULAR WITH FLOW

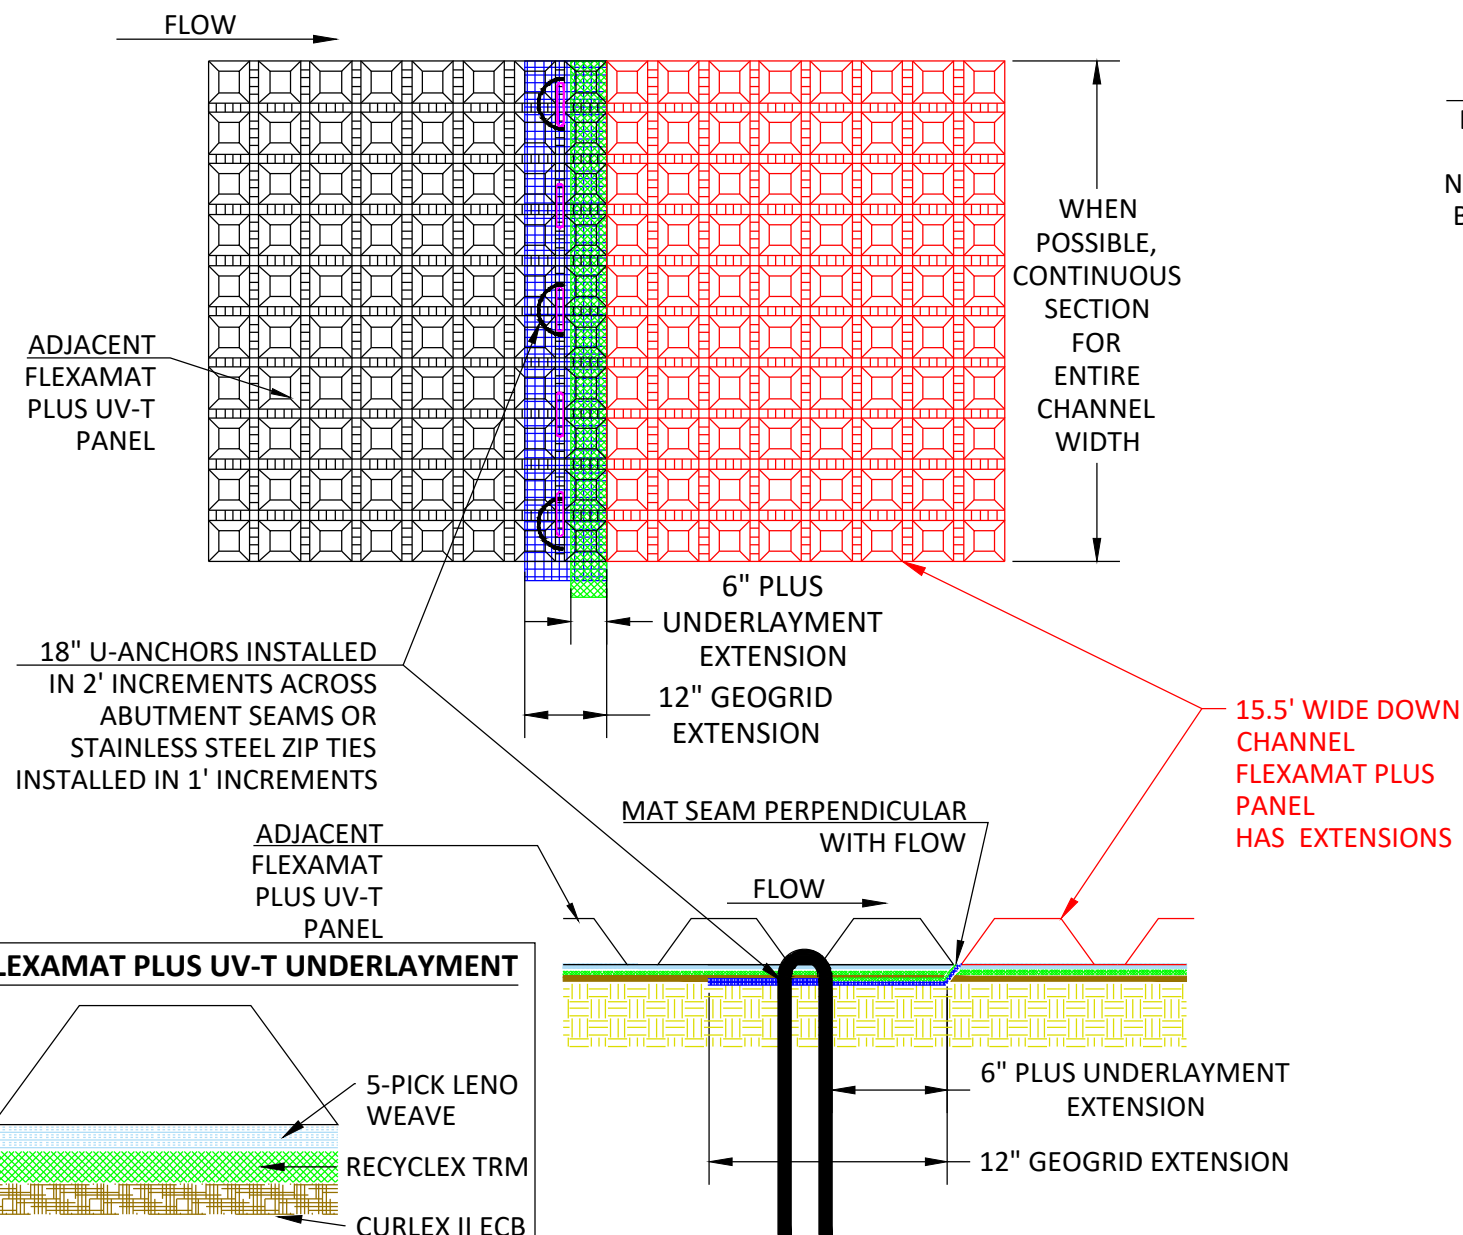

EMERGENCY SPILLWAY - ISOMETRIC VIEW

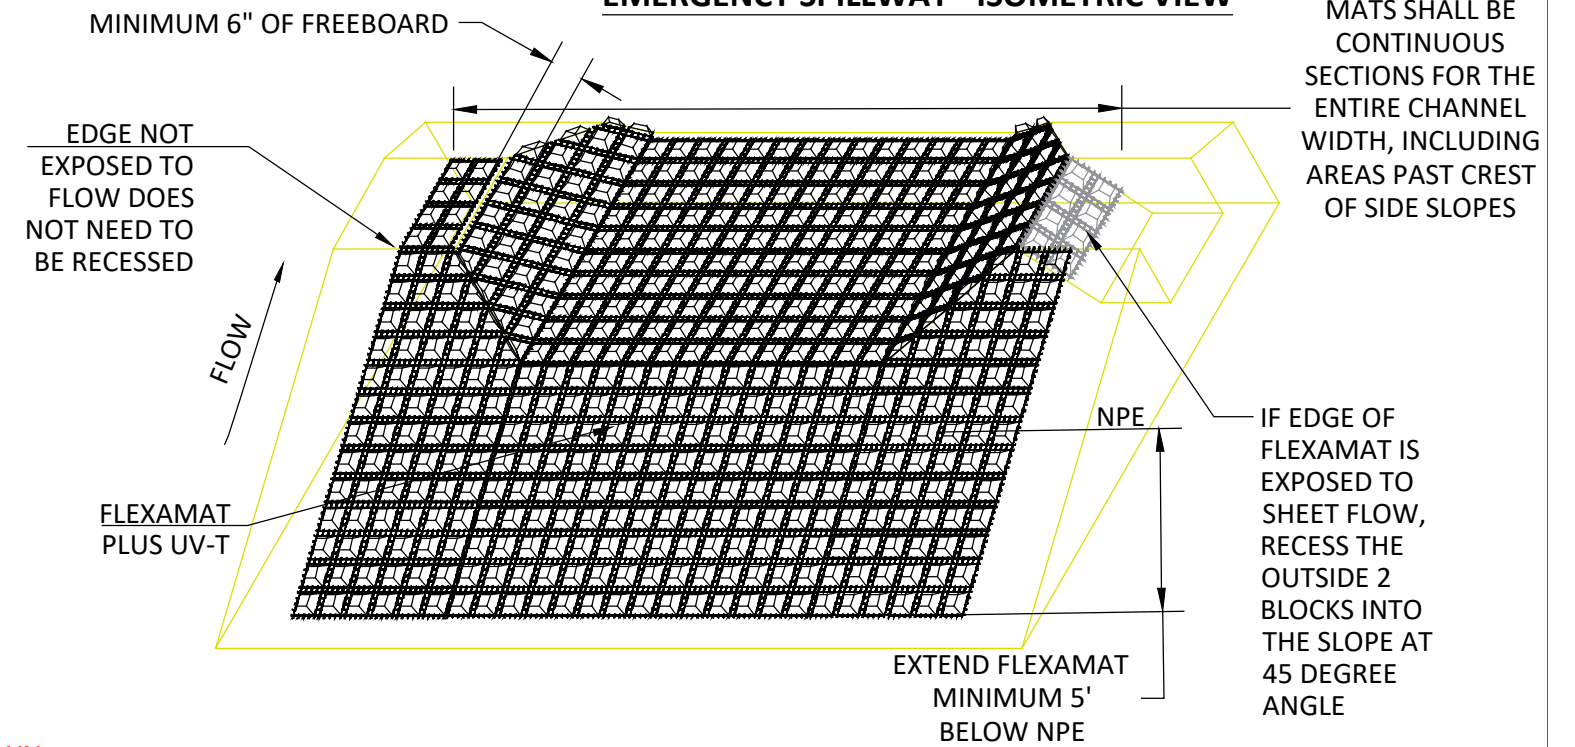

OVERFLOW DIKE - PROFILE VIEW

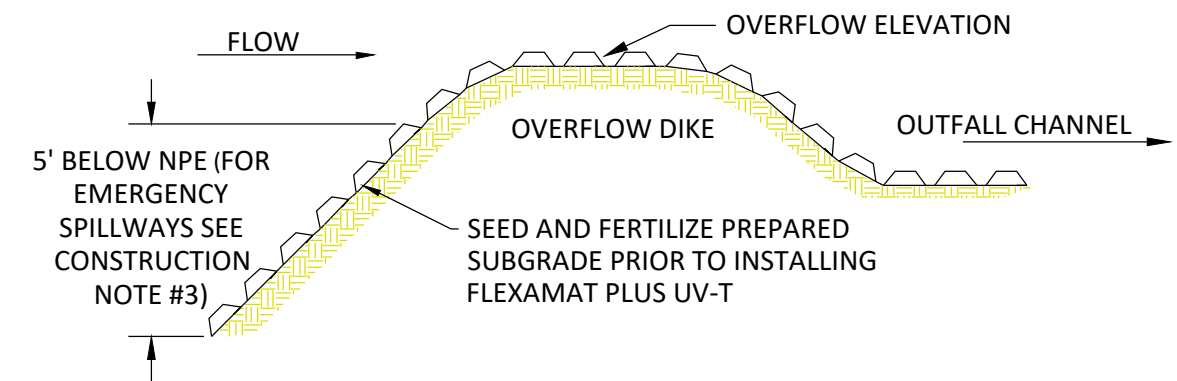

FLEXAMAT PLUS UV-T - OVERFLOW CHANNEL PERPENDICULAR TO FLOW

CONSTRUCTION NOTES:

1. AN ENGINEER OR MANUFACTURERS REPRESENTATIVE SHALL BE ONSITE FOR THE START OF THE INSTALLATION.
2. ALL SUBGRADE SURFACES PREPARED FOR PLACEMENT OF MATS SHALL BE SMOOTH AND FREE OF ALL ROCKS, STICKS, ROOTS, OTHER PROTRUSIONS, OR DEBRIS OF ANY KIND. THE PREPARED SURFACE SHALL PROVIDE A FIRM UNYIELDING SUBGRADE FOR THE MATS.
3. PRIOR TO THE FLEXAMAT PLUS UV-T INSTALLATION SEED AND FERTILIZE SUBGRADE WITH SITE SPECIFIC SEED MIX IN ACCORDANCE WITH THE PROJECT PLANS AND SPECIFICATIONS.
4. MAT SHALL EXTEND 5' BELOW NORMAL POND ELEVATION. (FOR EMERGENCY OVERFLOW INSTALLATIONS EXTEND THE MAT 3' DOWN THE INSIDE FACE OF THE OVERFLOW DIKE.)
5. INSTALL FLEXAMAT PLUS UV-T ROLLS. MANUFACTURER RECOMMENDS INSTALLING THE WIDEST MAT POSSIBLE FOR SPILLWAY APPLICATIONS.
6. INSTALLATION STARTS AT THE DOWN CHANNEL END AND MOVES UP THE CHANNEL, TOWARDS THE START OF CHANNEL.
 - 6.1. FOR WIDTHS WIDER THAN 16', INSTALL 15.5' WIDE MATS WITH GEOGRID AND TRM UNDERLAYMENT EXTENSIONS. INSTALL ADJACENT MAT OVER THE 12" GEOGRID AND 6" TRM UNDERLAYMENT EXTENSIONS OF THE ADJACENT MATS. ENSURE THE GEOGRID AND TRM UNDERLAYMENT EXTENSIONS ARE LAYING FLAT ON THE SUBGRADE BEFORE INSTALLING ADJACENT MAT OVER THE EXTENSIONS.
 - 6.2. INSTALL 18" U-ANCHORS IN 2' INCREMENTS OR STAINLESS STEEL ZIP TIES IN 1' INCREMENTS ACROSS MAT ABUTMENT SEAMS. INSTALL U-ANCHORS AND ZIP TIES PERPENDICULAR TO FLOW DIRECTLY BEHIND FIRST BLOCK OF THE UP-CHANNEL MAT. U-ANCHORS SHALL ENCOMPASS TWO CORDS OF GEOGRID ON EACH MAT. ZIP TIES SHALL ENCOMPASS 3 CORDS OF GEOGRID FROM EACH MAT.
7. AT THE END OF THE ARMORED SPILLWAY, EMBED THE MAT 18" IN A TERMINATION TRENCH. FILL AND COMPACT TERMINATION TRENCH WITH SUITABLE FILL. (AS SPECIFIED BY EOR.)

**MOTZ
ENTERPRISES, INC.**

Flexamat
(513)772-6689
Info@Flexamat.com
Flexamat.com

